


Material:	Brass Nickel Plated	
Working Temperature:	-40 ÷ 150	C°
Working Temperature:	-40 ÷ 302	F°
Working Pressure (max):	60	bar
Working Pressure (max):	870	psi
Vacuum:		kPa
Vacuum:		Hg
Conformity:	RoHS	

Conformity:	
Conformity:	
Conformity:	
Conformity:	
Application	Pneumatic, hydraulic and oleodynamic circuits

RA22

Male-female elbow

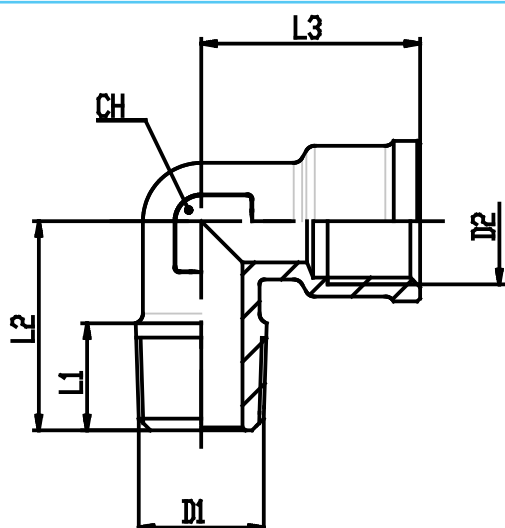

RA22

3D

CODE	TYPE	D1	D2	L1	L1IN	L2	L2IN	L3	L3IN	CH	G	OZ	WTF	WPP
5120001	RA22 18 18	R1/8	G1/8	8.2	.323	17	.669	18.5	.728	10	12.6	.444	-40 ÷ 302	870
5120002	RA22 14 14	R1/4	G1/4	11	.433	21.5	.846	22.5	.886	12	23.9	.843	-40 ÷ 302	870
5120003	RA22 38 38	R3/8	G3/8	12	.472	24.5	.965	25.5	1.004	15	40.9	1.443	-40 ÷ 302	870
5120004	RA22 12 12	R1/2	G1/2	14	.551	29.5	1.161	30	1.181	19	74.7	2.635	-40 ÷ 302	870
5120005	RA22 34 34	R3/4	G3/4	16	.630	33	1.299	36.5	1.437	25	98.1	3.460	-40 ÷ 302	870
5120006	RA22 1 1	R1"	G1"	17	.669	39	1.535	45	1.772	30	164	5.785	-40 ÷ 302	870