


Material: Brass Nickel Plated
Working Temperature: -40 ÷ 150 C°
Working Temperature: -40 ÷ 302 F°
Working Pressure (max): 60 bar
Working Pressure (max): 870 psi
Vacuum: kPa
Vacuum: Hg
Conformity: RoHS

Conformity:
Conformity:
Conformity:
Conformity:
Application Pneumatic, hydraulic and oleodynamic circuits

RA36
Male tee

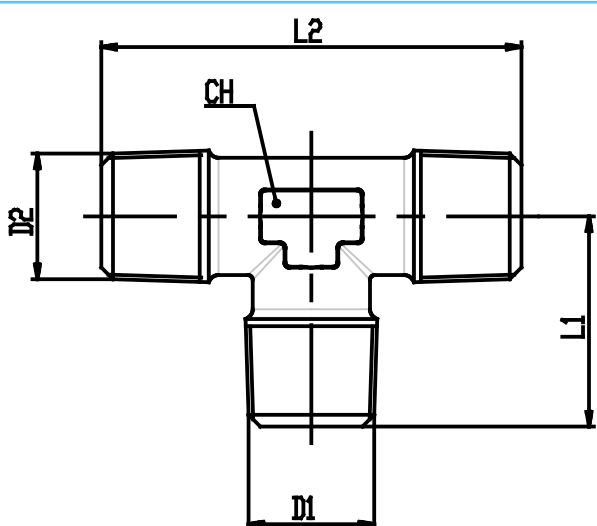

RA36

3D

CODE	TYPE	D1	D2	L1	L1IN	L2	L2IN	CH	G	OZ	WTF	WPP
5260001	RA36 18 18	R1/8	R1/8	17	.669	34	1.339	10	14.3	.504	-40 ÷ 302	870
5260002	RA36 14 14	R1/4	R1/4	21.5	.846	43	1.693	12	28.7	1.012	-40 ÷ 302	870
5260003	RA36 38 38	R3/8	R3/8	24.5	.965	49	1.929	15	50.6	1.785	-40 ÷ 302	870
5260004	RA36 12 12	R1/2	R1/2	29.5	1.161	59	2.323	19	93	3.280	-40 ÷ 302	870
5260005	RA36 34 34	R3/4	R3/4	34.5	1.358	69	2.717	22	138.6	4.889	-40 ÷ 302	870
5260006	RA36 1 1	R1"	R1"	40.5	1.594	81	3.189	28	239.3	8.441	-40 ÷ 302	870