


Material: Brass Nickel Plated
Working Temperature: -20 ÷ 80 °C°
Working Temperature: -4 ÷ 176 °F°
Working Pressure (max): 20 bar
Working Pressure (max): 290 psi
Vacuum: -99 kPa
Vacuum: 29" Hg
Conformity: Silicone Free

Conformity: RoHS
Conformity:
Conformity:
Conformity:
Application Pneumatic circuits

MA38

Stem adaptor

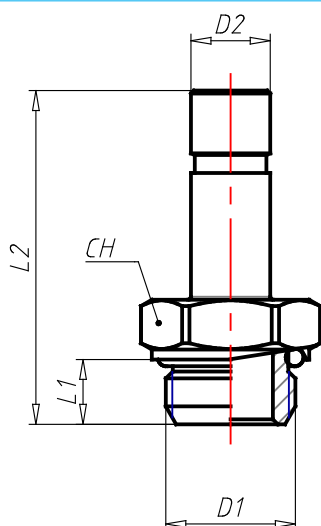

MA38

3D

CODE	TYPE	D1	D2	D2IN	L1	L1IN	L2	L2IN	CH	G	G0Z	WTF	WPP	TVH
A0280010	MA38 04 M5	M5x0,8	4	.157	4	.157	26	1.024	9	3.2	.113	-4 ÷ 176	290	29"
A0280011	MA38 04 18	G1/8	4	.157	5	.197	28	1.102	13	7.3	.257	-4 ÷ 176	290	29"
A0280012	MA38 04 14	G1/4	4	.157	6.5	.256	29.5	1.161	16	12.4	.437	-4 ÷ 176	290	29"
A0280030	MA38 06 M5	M5x0,8	6	.236	4	.157	28	1.102	9	5.9	.208	-4 ÷ 176	290	29"
A0280031	MA38 06 18	G1/8	6	.236	5	.197	30	1.181	13	8.5	.300	-4 ÷ 176	290	29"
A0280032	MA38 06 14	G1/4	6	.236	6.5	.256	32.5	1.28	16	13.7	.483	-4 ÷ 176	290	29"
A0280041	MA38 08 18	G1/8	8	.315	5	.197	31	1.22	13	9.4	.332	-4 ÷ 176	290	29"
A0280042	MA38 08 14	G1/4	8	.315	6.5	.256	33.5	1.319	16	14.5	.511	-4 ÷ 176	290	29"
A0280052	MA38 10 14	G1/4	10	.394	6.5	.256	34.5	1.358	16	15.5	.547	-4 ÷ 176	290	29"
A0280053	MA38 10 38	G3/8	10	.394	7	.276	35	1.378	20	22	.776	-4 ÷ 176	290	29"
A0280063	MA38 12 38	G3/8	12	.472	7	.276	38	1.496	20	23.6	.832	-4 ÷ 176	290	29"
A0280064	MA38 12 12	G1/2	12	.472	8.5	.335	39.5	1.555	25	38	1.340	-4 ÷ 176	290	29"