
cmatic®
PNEUMATIC FITTINGS

IQNET 9001:2015

IQNET 14001:2015
& 45001:2015

Material:	Zinc Plated Steel		**Conformity:**	RoHS
Working Temperature:	-30 ÷ 100	C°	**Conformity:**	
Working Temperature:	-22 ÷ 212	F°	**Conformity:**	
Working Pressure (max):	350	bar	**Conformity:**	
Working Pressure (max):	5076	psi	**Application**	Hydraulics
Vacuum:		kPa		
Vacuum:		Hg		
Conformity:				

Q012
Straight push-in fitting, BSPP thread

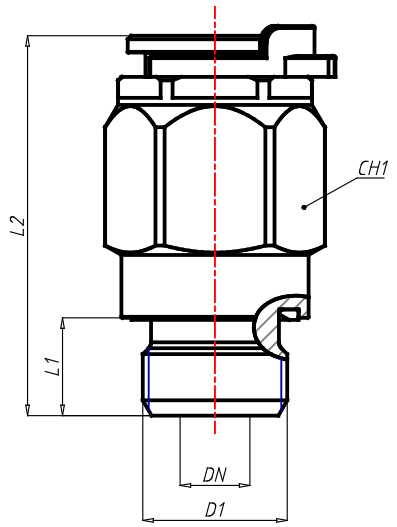

Q012 3D

NAME	CODE	TYPE	DN_DASH	D1	L1	L1IN	L2	L2IN	CH	G	OZ	WTF	WPP	NN
Q0020032	Q0020032	QO12 04 00	04	G1/4	12	.472	46	1.811	20	60,8	2.145	-22 ÷ 212	5076	0
Q0020053	Q0020053	QO12 06 00	06	G3/8	12	.472	48	1.890	24	85,5	3.016	-22 ÷ 212	5076	0
Q0020064	Q0020064	QO12 08 00	08	G1/2	14	.551	54,4	2.142	28	128,8	4.543	-22 ÷ 212	5076	0
Q0020075	Q0020075	QO12 12 00	12	G3/4	16	.630	62,1	2.445	38	228	8.042	-22 ÷ 212	5076	0

More info:
+39 0362 805246
cmatic@cmatic.it