
cmatic®
PNEUMATIC FITTINGS

IQNET 9001:2015

IQNET 14001:2015
& 45001:2015

Material:	Zinc Plated Steel		**Conformity:**	RoHS
Working Temperature:	-30 ÷ 100	C°	**Conformity:**	
Working Temperature:	-22 ÷ 212	F°	**Conformity:**	
Working Pressure (max):	350	bar	**Conformity:**	
Working Pressure (max):	5076	psi	**Application**	Hydraulics
Vacuum:		kPa		
Vacuum:		Hg		
Conformity:				

Q012-ORB
Straight push-in fitting, UNF thread

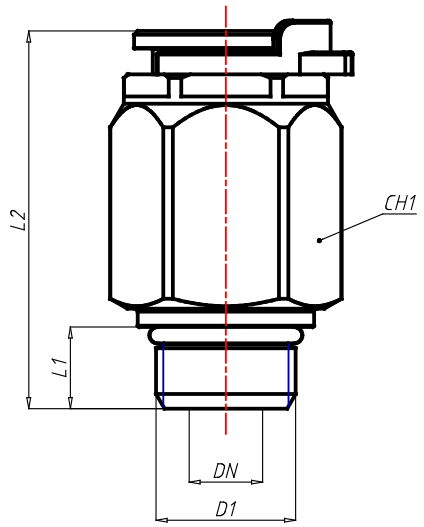

Q012- 3D

NAME	CODE	TYPE	DN_DASH	D1	L1	L1IN	L2	L2IN	CH	G	OZ	WTF	WPP	NN
Q0020M3E-ORB	Q0020M3E-ORB	QO12 04 7/16 UNF ORB	04	7/16-20	9,1	.358	42,6	1.677	20	-	-	-22 ÷ 212	5076	0
Q0020M5A-ORB	Q0020M5A-ORB	QO12 06 9/16 UNF ORB	06	9/16-18	10	.394	45,3	1.783	24	-	-	-22 ÷ 212	5076	0
Q0020M6F-ORB	Q0020M6F-ORB	QO12 06 3/4-16 UNF ORB	08	3/4-16-16	11,1	.437	51,4	2.024	28	-	-	-22 ÷ 212	5076	0
Q0020N7D-ORB	Q0020N7D-ORB	QO12 04 1-1/16 UN ORB	12	1 1/16-12	15,1	.594	60,6	2.386	38	-	-	-22 ÷ 212	5076	0

More info:
+39 0362 805246
cmatic@cmatic.it