


BSPP FEMALE - 60° CONE THRUST-WIRE NUT

FEMMINA DIRITTA BSPP SV 60° DADO SPINATO CON O-RING
FEMELLE DROITE BSPP AVEC O-RING CÔNE 60° (ÉCROU À JONC)
DKOR 60° KONUS MIT O-RING (BSPP- GEWINDE) + GESTIFTETE
ÜBERWURFMUTTER
HEMBRA GIRATORIA RECTA BSPP CON O-RING CONO 60°
(TUERCA CON SEGURO)

* : without o-ring / senza o-ring

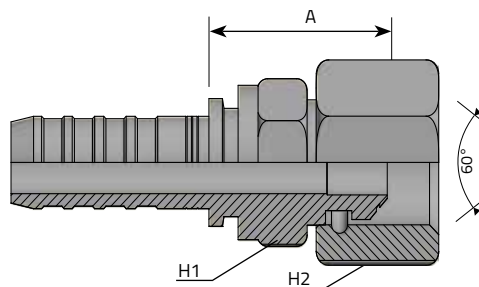

	Code	Tube		Thread		Dimensions			
		D.N.	Hose	Diam	T	t/1"	H1	H2	A
		Inch		mm	Inch		mm	mm	
*	HFDG0606SP	-6	3/8"	9.5	3/8"	19	22	22	32
*	HFDG0608SP	-6	3/8"	9.5	1/2"	14	22	27	33
*	HFDG0806SP	-8	1/2"	12.8	3/8"	19	27	22	32
*	HFDG0808SP	-8	1/2"	12.8	1/2"	14	27	27	33
*	HFDG0810SP	-8	1/2"	12.8	5/8"	14	-	-	-
	HFDG0812SP	-8	1/2"	12.8	3/4"	14	27	32	37
*	HFDG1008SP	-10	5/8"	16	1/2"	14	32	27	34
	HFDG1010SP	-10	5/8"	16	5/8"	14	-	-	-
	HFDG1012SP	-10	5/8"	16	3/4"	14	32	32	38
*	HFDG1208SP	-12	3/4"	19	1/2"	14	34	27	34
	HFDG1212SP	-12	3/4"	19	3/4"	14	34	32	38
	HFDG1216SP	-12	3/4"	19	1"	11	34	41	38
	HFDG1612SP	-16	1"	25.4	3/4"	14	42	32	40
	HFDG1616SP	-16	1"	25.4	1"	11	42	41	40
	HFDG1620SP	-16	1"	25.4	1.1/4"	11	42	50	41.5
	HFDG2020SP	-20	1.1/4"	31.8	1.1/4"	11	50	50	47.7
	HFDG2024SP	-20	1.1/4"	31.8	1.1/2"	11	50	55	49.7