


Material: Brass Nickel Plated
Working Temperature: -40 ÷ 150 C°
Working Temperature: -40 ÷ 302 F°
Working Pressure (max): 60 bar
Working Pressure (max): 870 psi
Vacuum: kPa
Vacuum: Hg
Conformity: RoHS

Conformity:
Conformity:
Conformity:
Conformity:
Application Pneumatic, hydraulic and oleodynamic circuits

RA17

Adaptor male-female, parallel

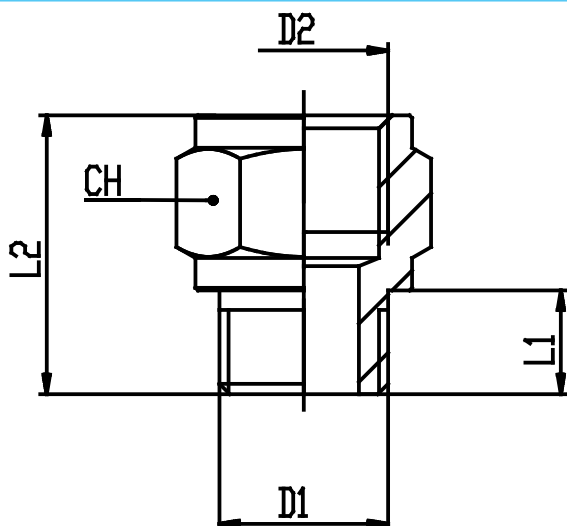

RA17

3D

CODE	TYPE	D1	D2	L1	L1IN	L2	L2IN	CH	G	OZ	WTF	WPP
5070001	RA17 M5 18	M5x0,8	G1/8	4	.157	14.5	.571	14	7	.247	-40 ÷ 302	870
5070101	RA17 18 18	G1/8	G1/8	6	.236	16.5	.650	14	10.7	.377	-40 ÷ 302	870
5070102	RA17 18 14	G1/8	G1/4	6	.236	19.5	.768	17	17	.600	-40 ÷ 302	870
5070103	RA17 18 38	G1/8	G3/8	6	.236	20.5	.807	22	29.5	1.041	-40 ÷ 302	870
5070202	RA17 14 14	G1/4	G1/4	8	.315	21.5	.846	17	19	.670	-40 ÷ 302	870
5070203	RA17 14 38	G1/4	G3/8	8	.315	22.5	.886	22	32	1.129	-40 ÷ 302	870
5070204	RA17 14 12	G1/4	G1/2	8	.315	26	1.024	24	37	1.305	-40 ÷ 302	870
5070303	RA17 38 38	G3/8	G3/8	9	.354	23.5	.925	22	36	1.270	-40 ÷ 302	870
5070304	RA17 38 12	G3/8	G1/2	9	.354	27	1.063	24	37	1.305	-40 ÷ 302	870
5070404	RA17 12 12	G1/2	G1/2	10	.394	28	1.102	26	52.5	1.852	-40 ÷ 302	870