


Material: Brass Nickel Plated
Working Temperature: -40 ÷ 150 C°
Working Temperature: -40 ÷ 302 F°
Working Pressure (max): 60 bar
Working Pressure (max): 870 psi
Vacuum: kPa
Vacuum: Hg
Conformity: RoHS

Conformity:
Conformity:
Conformity:
Conformity:
Application Pneumatic, hydraulic and oleodynamic circuits

RA12

Nipple, taper

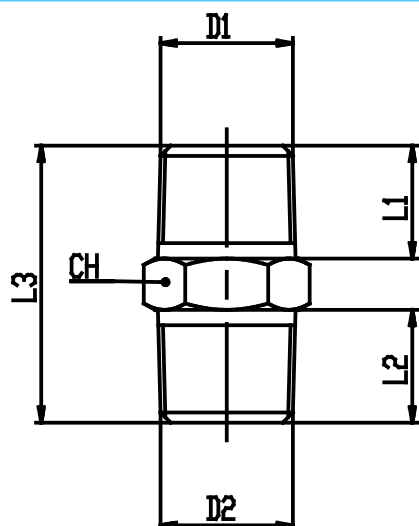

RA12

3D

CODE	TYPE	D1	D2	L1	L1IN	L2	L2IN	L3	L3IN	CH	G	OZ	WTF	WPP
5020101	RA12 18 18	R1/8	R1/8	7.5	.295	7.5	.295	19.5	.768	12	8	.282	-40 ÷ 302	870
5020102	RA12 18 14	R1/8	R1/4	8	.315	11	.433	24	.945	14	14.4	.508	-40 ÷ 302	870
5020103	RA12 18 38	R1/8	R3/8	8	.315	11.5	.453	24.5	.965	17	20	.705	-40 ÷ 302	870
5020202	RA12 14 14	R1/4	R1/4	11	.433	11	.433	27	1.063	14	15.2	.536	-40 ÷ 302	870
5020203	RA12 14 38	R1/4	R3/8	11	.433	11.5	.453	27.5	1.083	17	20.4	.720	-40 ÷ 302	870
5020204	RA12 14 12	R1/4	R1/2	11	.433	14	.551	30.5	1.201	22	35.6	1.256	-40 ÷ 302	870
5020303	RA12 38 38	R3/8	R3/8	11.5	.453	11.5	.453	28	1.102	17	25.1	.885	-40 ÷ 302	870
5020304	RA12 38 12	R3/8	R1/2	11.5	.453	14	.551	31	1.220	22	38.5	1.358	-40 ÷ 302	870
5020404	RA12 12 12	R1/2	R1/2	14	.551	14	.551	33.5	1.319	22	41.8	1.474	-40 ÷ 302	870
5020405	RA12 12 34	R1/2	R3/4	14	.551	16.5	.650	37	1.457	27	69	2.434	-40 ÷ 302	870
5020505	RA12 34 34	R3/4	R3/4	16.5	.650	16.5	.650	39.5	1.555	27	78.9	2.783	-40 ÷ 302	870
5020506	RA12 3/4 1	R3/4	R1"	16.5	.650	19	.748	42.5	1.673	34	112.4	3.965	-40 ÷ 302	870
5020606	RA12 1 1	R1"	R1"	19	.748	19	.748	45.5	1.791	34	127.5	4.497	-40 ÷ 302	870