


Material: Brass Nickel Plated
Working Temperature: -40 ÷ 150 C°
Working Temperature: -40 ÷ 302 F°
Working Pressure (max): 60 bar
Working Pressure (max): 363 psi
Vacuum: kPa
Vacuum: Hg
Conformity:

Conformity: RoHS
Conformity:
Conformity:
Conformity:
Application Pneumatic, hydraulic and oleodynamic circuits

M019 Taper Male Tee

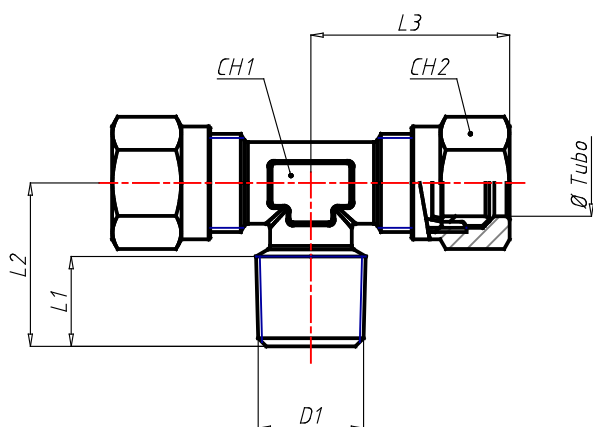

M019

3D

NAME	CODE	TYPE	DTUBO	D1	L1	L1IN	L2	L2IN	L3	L3IN	CH1	CH2	G	OZ	WTF	WPP	NN
03090011	03090011	MO19 04 18	4	R1/8	8	.315	16	.630	21	.827	9	10	22	.776	-40 ÷ 302	363	0
03090021	03090021	MO19 05 18	5	R1/8	8	.315	16	.630	23	.906	9	12	28	.988	-40 ÷ 302	363	0
03090031	03090031	MO19 06 18	6	R1/8	8	.315	16	.630	23	.906	9	12	28	.988	-40 ÷ 302	363	0
03090032	03090032	MO19 06 14	6	R1/4	11	.433	20	.787	24	.945	11	12	29	1.023	-40 ÷ 302	363	0
03090041	03090041	MO19 08 18	8	R1/8	8	.315	17	.669	24	.945	11	14	38	1.340	-40 ÷ 302	363	0
03090042	03090042	MO19 08 14	8	R1/4	11	.433	20	.787	24	.945	11	14	40	1.411	-40 ÷ 302	363	0
03090052	03090052	MO19 10 14	10	R1/4	11	.433	23,5	.925	32	1.260	13	19	79,5	2.804	-40 ÷ 302	363	0
03090053	03090053	MO19 10 38	10	R3/8	11,5	.453	24	.945	32	1.260	13	19	92	3.245	-40 ÷ 302	363	0
03090063	03090063	MO19 12 38	12	R3/8	11,5	.453	25,5	1.004	34,5	1.358	15	22	118	4.162	-40 ÷ 302	363	0
03090064	03090064	MO19 12 12	12	R1/2	14	.551	28,5	1.122	34,5	1.358	15	22	128	4.515	-40 ÷ 302	363	0
03090084	03090084	MO19 15 12	15	R1/2	14	.551	30	1.181	38	1.496	17	27	168	5.926	-40 ÷ 302	363	0